


Possible new feature: Translucent polymer cap to inspect unit functioning.

Pressure regulator included.

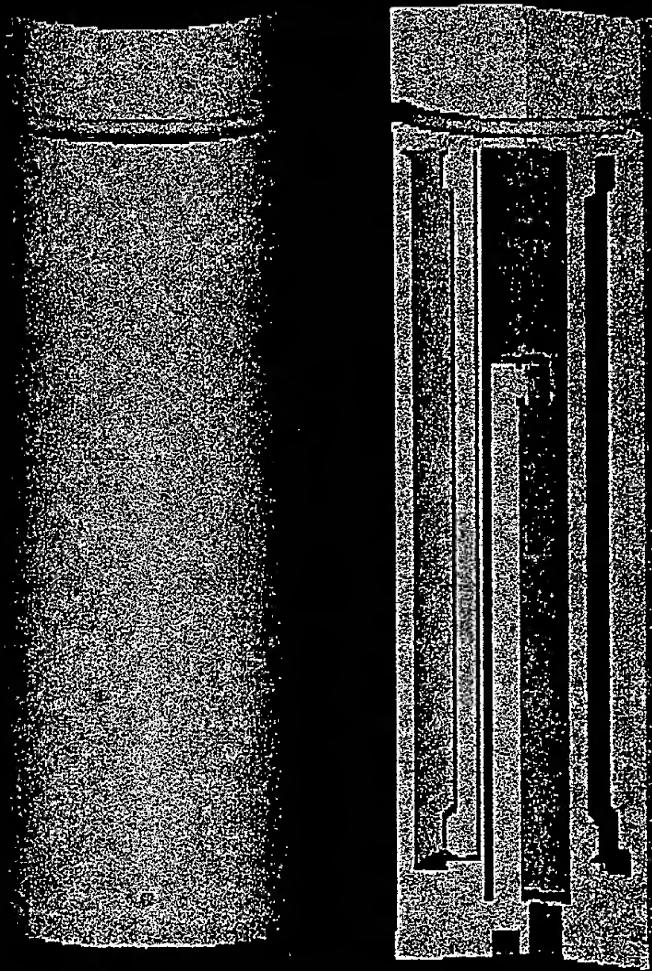

1. wasted space bet. filter & housing →
  - a. provide insulative material to occupy space
  - b. Use centrifugal action of oil flow in space to swing out particles
  - c. Add extra filter element around mid core.
2. Oil pressure line lets contaminants drain back to engine
  - a. provide closed tube w/ holes  $\frac{1}{16}$  for oil exit & dispersion  
dispenses heat from incoming oil, providing less element melting
3. If filter is snug against evaporation tube, oil holes are at top of tube → filter life compromised  
and oil stagnation results. If oil drains back down through filter (holes at bot. of tube)  
easy inspection of filter element.

THE GENEALOGY OF THE HANSHI

